

# General

Product Type	Constant Current Driver,	
	Wireless,	
Length (mm)	167	
Width (mm)	41	
Height (mm)	32	
Housing Color	White	
Housing Material	Plastic	
Mounting	Surface mounted	
Weight (g)	125	

### **Electronics**

Input Domain	AC
Input Voltage	100 ~ 240V AC
Input Current max (A)	0.1A @ 230V AC
Output Voltage	9 ~ 42V DC
Output Current (mA) max/output	100~400
Output Power Range (W)	1~12
Power Factor at Full Load	+0.85 @ 230VAC
Power Supply	Internal
Power Supply LED Outputs	Internal
5	111011101
LED Outputs	1
LED Outputs Anti Surge	1 L-N: 1kV
LED Outputs Anti Surge Efficiency	1 L-N: 1kV 80%

### Lighting

Oalan Danas	Oinela Oalan
Color Range	Single Color

# Control

Output Signal	PWM-CC
Control	Bluetooth
Dimming Range	0~100%, 0.1% dimming depth.
Number of Channels	1

### Protection

Protection Class	I1
------------------	----

#### Environmental

Storage Temperature	-40 ~ +80 °C
Operating Temperature	-20 ~ +50 °C
Fire-retardant	V-O
Ingress Protection	IP20
Safety Standards	NEN-EN-IEC 61347-1,
	NEN-EN-IEC 61347-2-13,





**IP20** 

5 year

#### Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.



oneeighty one.com

# SE-12-100-400-W1Y

# Tuya Bluetooth Mesh

# Intelligent LED Driver (Constant Current)

- Adopt SAMSUNG/COVESTRO V0 flame resistant polycarbonate protective housings with small size and light weight.
- Bluetooth Mesh & Tuya application protocol with high networking capability are reliable and stable.
- · With soft-on and fade-in dimming function enhancing visual comfort.
- · Adjust brightness levels when lights are turned on or go to the brightness level adjusted last time.
- T-PWM dimming technology allows continuous and flicker-free images under high-speed shooting.
- 0-100% flicker-free dimming with high frequency exemption level.
- Dimming from 0~100%, down to 0.01%.
- Innovative thermal management technology protects the power life intelligently.
- · Overheat, over voltage, overload, short circuit protection and automatic recovery.
- Suitable for indoor light applications of I / II / III type.
- Up to 50000-hour life time.
- 5-year warranty (Rubycon capacitor).



Flicker-free **IEEE 1789** 

Dimmable: ..... 0.01-100%

























# **Technical Specs**

Wireless type: Tuya Bluetooth Mesh Input voltage: 100-240Vac (120-300Vdc)

0/50/60Hz Output voltage: 9-42Vdc Frequency:

Max output voltage: 50Vdc Input current: 115Vac≤0.2A, 230Vac≤0.1A

100-400mA PF≥0.95/115Vac , PF≥0.85/230Vac (Full load) Output current: Power factor:

Load power range: 1W~12W 80% Efficiency (Typ):

Flicker level: No visible flicker/High frequency Inrush current: Cold start5A@230Vac (Test twidth=40 us tested under

Anti surge:

exemption level

LF current ripple(<120Hz): Leakage current: <0.24mA/230Vac <1%

Working temperature: ta: -20 ~ 50°C tc: 75°C Current accuracy: ±5%

Ripple & noise: Working humidity: 20 ~ 95%RH, non-condensing ≤2V

10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively Vibration: PWM dimming frequency: ≤3600Hz

#### Protection

Dimming range:

Overvoltage protection: Shut down the output and recover automatically

once it exceeds no-load voltage.

0~100%, 0.01% depth dimming

Overload protection: Shut down the output and recover automatically

once it exceeds 1.02 times of the max load power.

Intelligently adjust or turn off the output current if the PCB temperature ≥110°C, and recover automatically Overheat protection:

Short circuit protection: When short circuit occurs, shut down the output and

recover automatically

### Safety & EMC

Withstand voltage: I/P-O/P:3750Vac

L-N: 1kV

I/P-O/P:500Vdc/1min/25°C/70%RH≥10MΩ Insulation resistance:

IEC/EN61347-1, IEC/EN61347-2-13 Safety standards:

EN55015, EN61000-3-2, IEC61000-3-3 EMC emission:

EMC immunity: EN61000-4-2,3,4,5,6,8,11, EN61547

Strobe test standard: IFFF 1789

#### Others

Dimensions(LxWxH): 167x41x32mm Package size(LxWxH): 168x43x35mm Gross weight: 120g±10g



# **LED Current Selection**

DIP switch quickly selects multiple current value (See the table below).


 $\boldsymbol{\ast}$  Please set current value when the driver is power-off




	DIP switch	五五十	TIT	4 T T	4 7 7	TAT	TTL	TTT	Ŧ
SE-12-100-400-W1Y	Output current	100mA	150mA	200mA	250mA	300mA	350mA	400mA	ON
	Output voltage	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V	9-30V	4
	Output power	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12W	3.15-11.9W	3.6-12W	OFF

# **Product Size**

Unit: mm

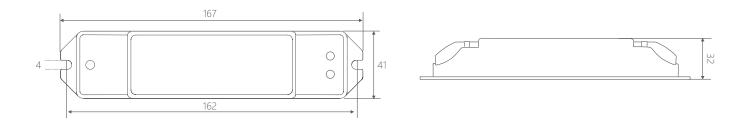


# **Wiring Diagram**

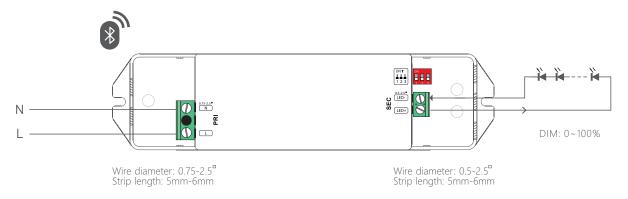



Access the network to control through App and Bluetooth



# **Relationship Diagrams**

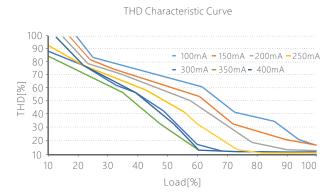

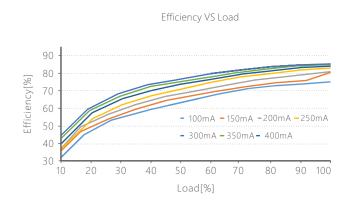

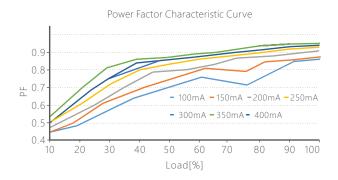


# **Flicker Test Table**


Limit Value of Modulation in Low Risk Areas

Waveform frequency of Optical output  $f \le 8$ Hz 8Hz  $6 \le 90$ Hz  $6 \le 90$ Hz  $6 \le 8$ Hz  $6 \le 90$ Hz  $6 \le 8$ Hz  $6 \le$ 

IEEE 1789

8Hz < f ≤ 90Hz	0.025 ×f				
90Hz < f ≤ 1250Hz	0.08 ×f				
f > 1250Hz	Exemption assessment				
Limit Value of Modulation in No Effect Areas					
Waveform frequency of Optical output					
f ≤ 10Hz	0.1				
10Hz < f ≤ 90Hz	0.01 ×f				
90Hz < f ≤ 3125Hz	(0.08/2.5) × f				
f > 3125Hz	Exemption assessment (High frequency exemption)				



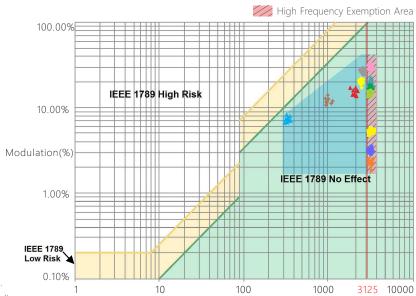

Frequency(Hz)

Modulation Area

Marks in the right chart are tested results of different current level.

The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.



# **App Operating Instructions**

#### 1. Register an account

Tuya Smart App is compatible with iOS and Android systems. Scan the QR code below with you mobile phone and follow the prompts to complete the app installation. After installation being completed, you can log in or register an account.

# APP support









App download

#### 2. Paring instructions

A new user clicks "Me"  $\rightarrow$  "Home Management"  $\rightarrow$  "Create a Home", give a name to your home and confirm your home location, then add the rooms you need. Click "Add Device" - "Auto Scan" and enable permissions for automatically scanning Bluetooth/Wi-Fi/Zigbee/wired devices. Follow the prompts to add the device (Ensure that the device is ready for network connection).

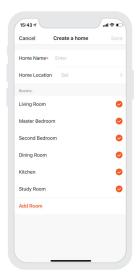


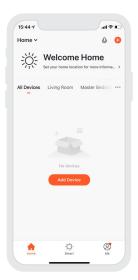



# 3. Lighting control settings

After paring up your device, click the device you add and adjust to your desired lighting status by changing brightness. In "Settings", there are also lighting alarm clock (Tuya Bluetooth Gateway needs to be added) and countdown functions.

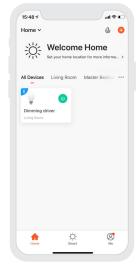








- 4. Remote control and automation
  - 4.1 Remote control: Add Tuya Bluetooth MESH (SIG) Gateway by search bluetooth devices, and follow the prompts to configure the gateway to the network. After configuring the network, access the gateway interface and click "Add to the list" or "Search for new devices" to add the device to the gateway, and then the device can be controlled remotely.






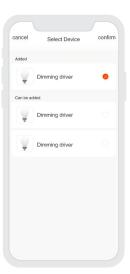

4.2 Automation settings: After adding Tuya Bluetooth MESH (SIG) Gateway, you'll be able to control the lighting remotely by clicking "Automation" in the "Smart" menu. In "Automation", set up conditions from weather, location and timing to other device status so as to trigger the lighting effects you preset and realize the lighting automation.






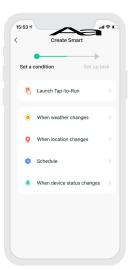



# **Reset The Device (Reset to factory defaults)**

When the driver is power-on, turn it off and after 10s turn it on. After 2s, turn it off again. Repeat the same operation 5 times and then turn on the driver again. When the lamp is flashing (2 flashes/s), reset the device successfully.



Under the driver being power-on

Turn it off — 10s — Turn it on — 2s — .....

(Repeat 5 times)



#### **Attentions**

- Products shall be installed by qualified professionals.
- LTECH products are non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- Good heat dissipation will extend the working life of products. Please ensure good ventilation.
- Please check if the working voltage used complies with the parameter requirements of products.
- The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
- Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
- If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- \* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

#### **Warranty Agreement**

- Warranty periods from the date of delivery: 5 years
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- · Beyond warranty periods.
- · Any artificial damage caused by high voltage, overload, or improper operations.
- · Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- · Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1.Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2.LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

www.ltech-led.com