


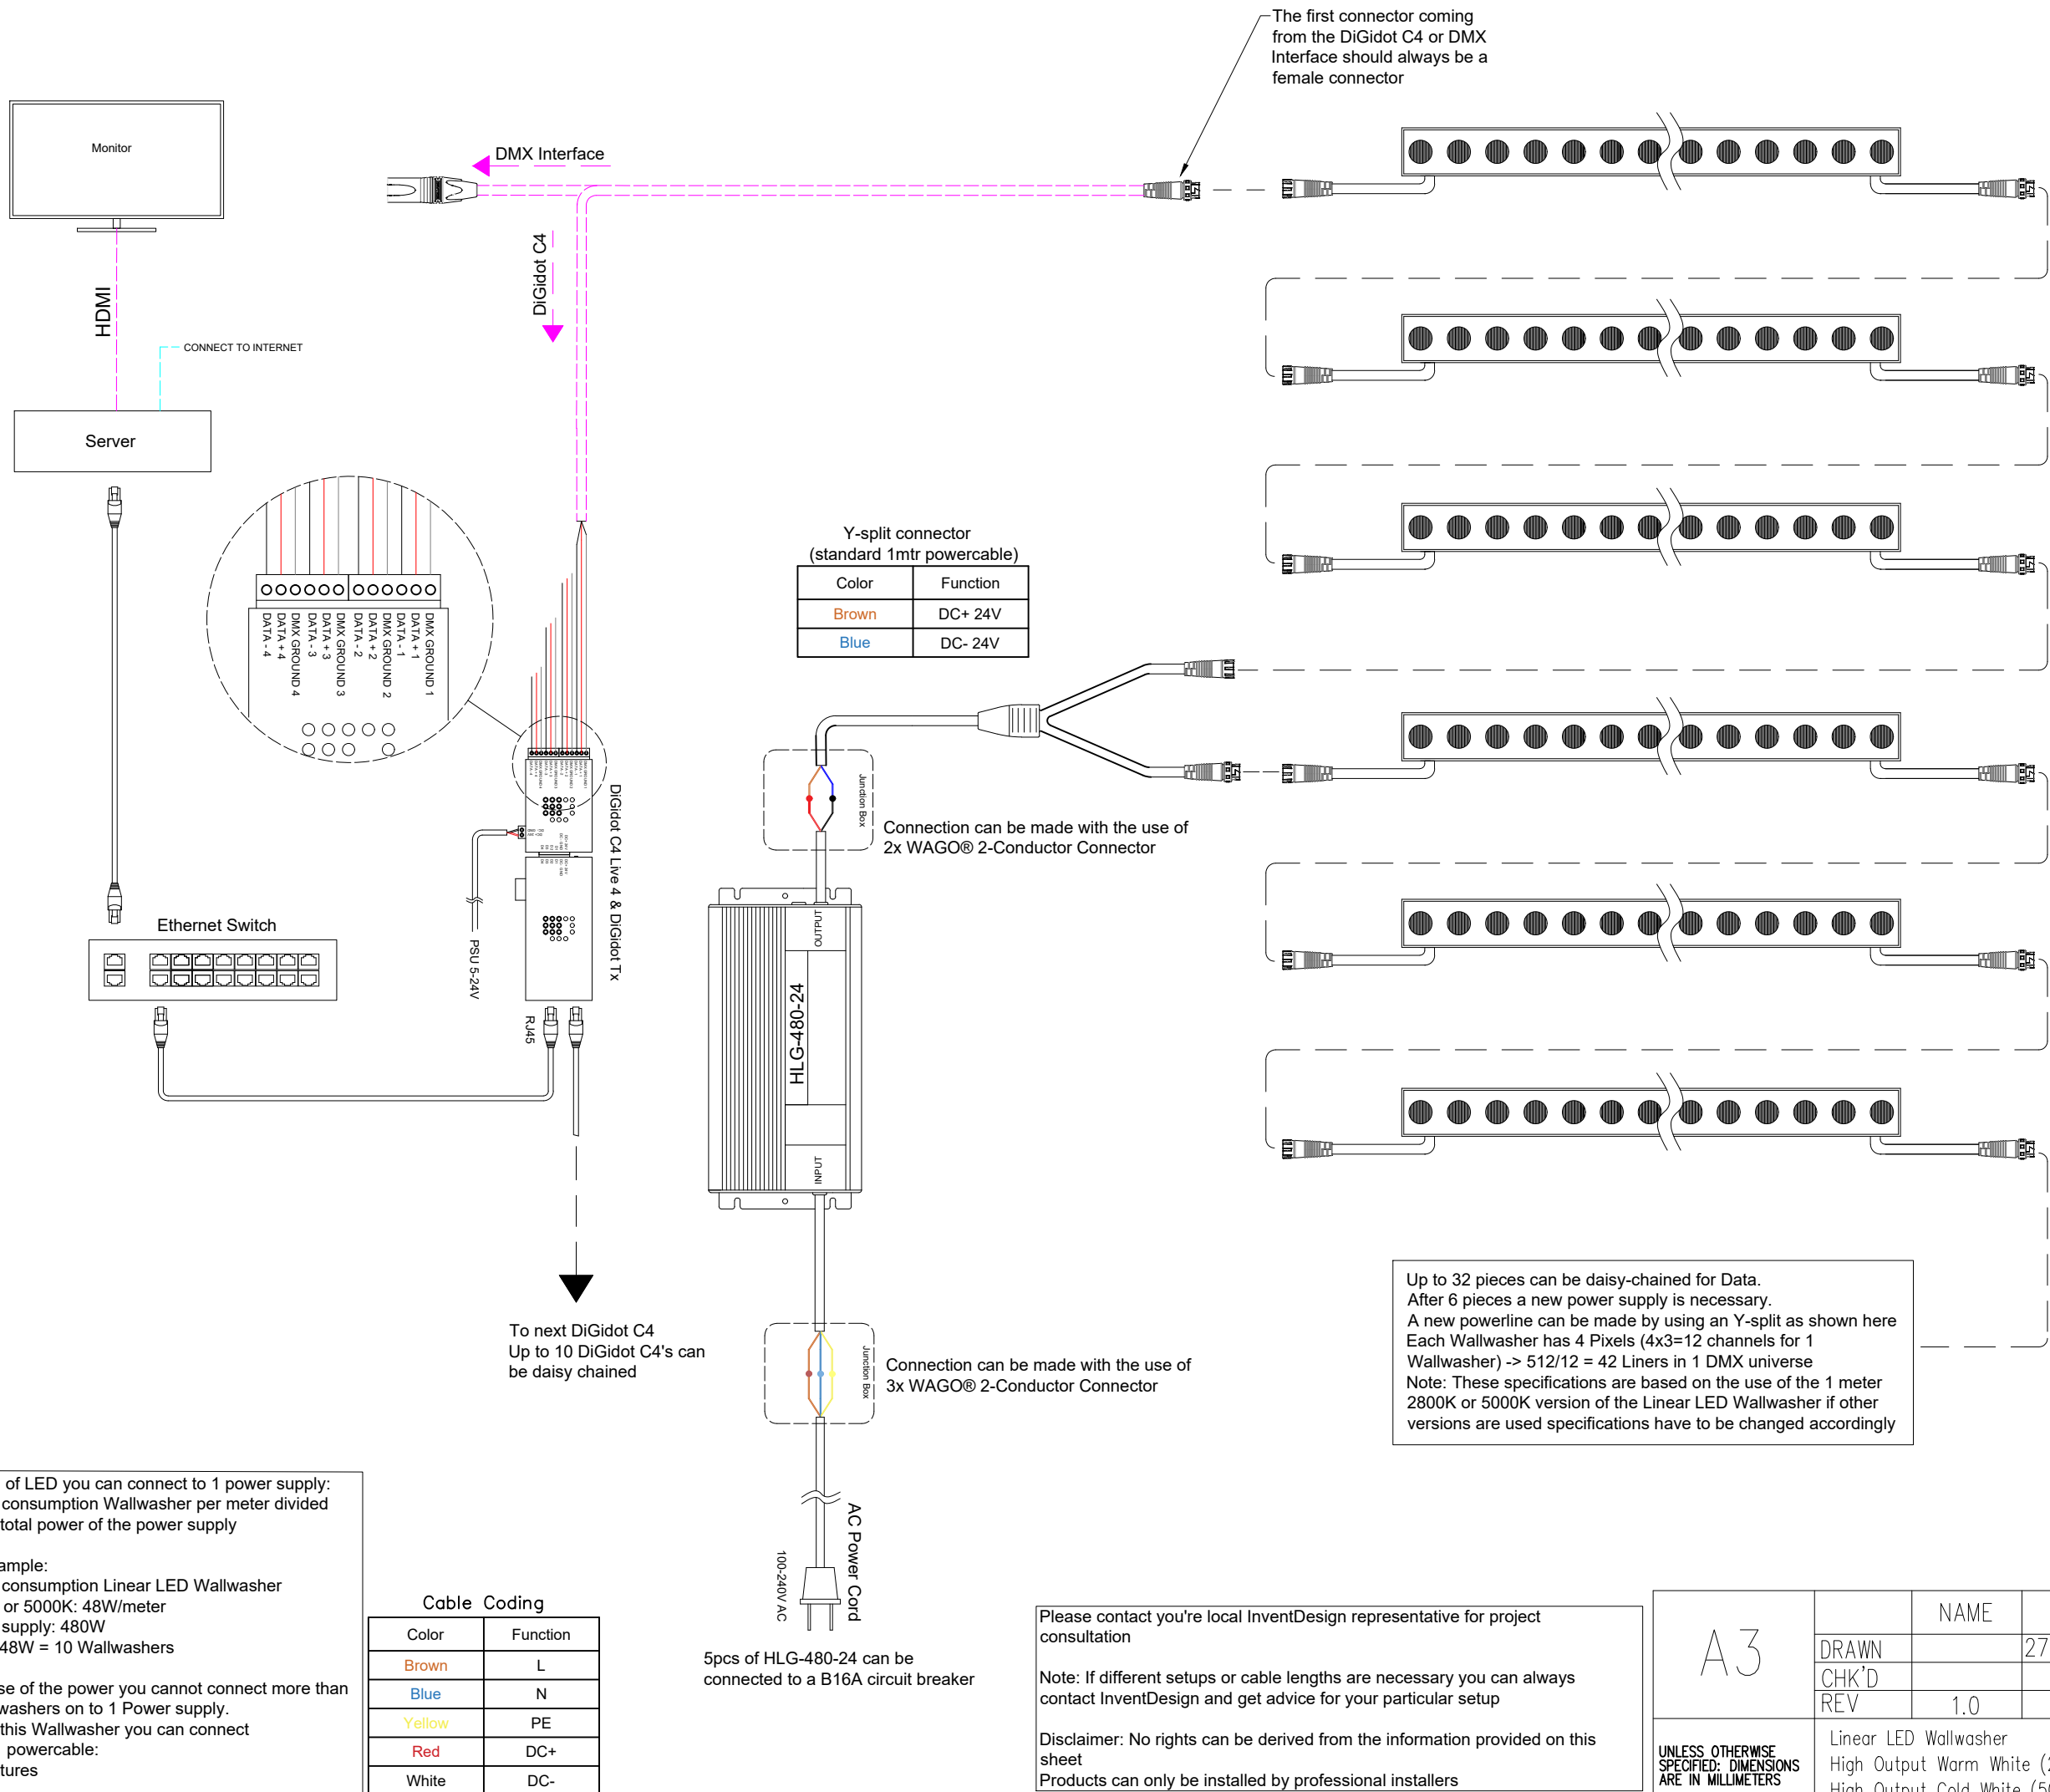

PinOut Programming

5pin DMX connector	WireColor	Function
1	Blue	GND
2	Green	Data -
3	White	Data +
4	Black	Programmer
5	Brown	V+ 24V

PinOut DMX

3pin DMX connector	WireColor	Function
1	Blue	GND
2	Green	Data -
3	White	Data +

Suggested Accessories	Art.nr
Y-split connector with 1mtr cable	70502
Input connector with 1mtr cable	70501
HLG-480-24	84418
DiGidot C4 Live 4	20101
DiGidot Tx	20303
Endcap for connector	70505



TITLE: WIRING DIAGRAM

PRODUCT: 34215/ 34218

SCALE: NOT TO SCALE | SHEET 1 OF 1

Please contact you're local InventDesign representative for project consultation

Note: If different setups or cable lengths are necessary you can always contact InventDesign and get advice for your particular setup

Disclaimer: No rights can be derived from the information provided on this sheet
Products can only be installed by professional installers

A3	NAME	DATE
	DRAWN	27-12-2018
	CHK'D	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	REV	1.0
	Linear LED Wallwasher High Output Warm White (2800 K)/ High Output Cold White (5000K)	

Length of LED you can connect to 1 power supply:
Power consumption Wallwasher per meter divided by the total power of the power supply

For example:
Power consumption Linear LED Wallwasher
2800K or 5000K: 48W/meter
Power supply: 480W
480W/48W = 10 Wallwashers

Because of the power you cannot connect more than 6 Wallwashers on to 1 Power supply.
-> For this Wallwasher you can connect on 1 powercable: 6 fixtures

Cable Coding	
Color	Function
Brown	L
Blue	N
Yellow	PE
Red	DC+
White	DC-

5pcs of HLG-480-24 can be connected to a B16A circuit breaker