
LEDstrip COB Single color System diagram Basic ON/OFF Ensure a proper connection is made PSU 100-230VAC ∋ Junction box **Basic DALI** 100-230VAC For connection please refer to the DALI-PS-DIN manual DALI BUS To Next For connection 24VDC please refer to the Dali controller DA1 manual **Basic Remote** \oplus $\bigoplus_{i=1}^{n}$ Uin DC+DC- $\check{\ominus}$ For connection please refer to the 24VDC = M1 manual RF SIGNAL Advanced Up to 5pcs of Digidot C4 With the use of the DiGidot PxLNet Transmitter up to 250mtr cable can be daisy-chained length for data to the DMX/RDM controller can be achieved

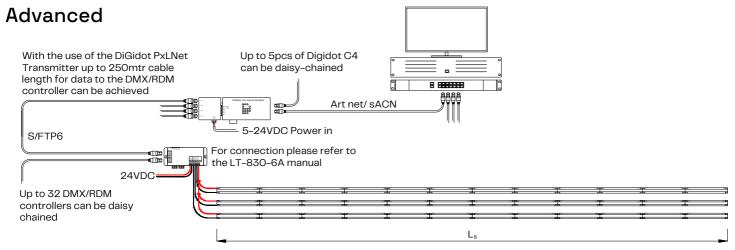

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

OneEightyOne Valschermkade 27 - 28 | 1059CD | Amsterdam +31 20 8200170 | info@oneeightyone.com | www.oneeightyone.com

©2021

oneeighty one.com