LED Touch Controller DMX/RF CT - EX2



General	
Product Type	Controller
Length (mm)	86
Width (mm)	86
Height (mm)	36
Housing Color	White
Housing Material	PC
Mounting	Built-in
Weight (g)	225
Electronics	
Input Domain	AC
Input Voltage	100 ~ 240V AC
Power Supply	Internal
LED Outputs	2
Lighting	
Color Range	Tunable White
Control	
Output Signal	DMX, RF
Control	DMX, Radio Frequency
Number of Channels	2
Functions	programmable
Environmental	
Operating Temperature	-20 ~ +55 °C
Ingress Protection	IP20



Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

18



2259200

OneEightyOne Valschermkade 27 - 28 | 1059CD | Amsterdam +31 20 8200170 | info@oneeightyone.com | www.oneeightyone.com

EX2 Touch Panel (CT)



Manual


www.ltechonline.com

Technical Specs

EX2 Color Temperature Touch Panel


LTECH

Product Size:




25

EX2



125mm EE EE 119mm

F4-3A



L86×W86×H37(mm) 100~240Vac Dimensions: Input Voltage: RF 2.4GHz, DMX512 Package Size: L113×W112×H50(mm) Output Signal: Weight(G.W.): 225g Working Temp.: -30°C~55°C F4-3A CV Receiver Working Temp.: -30°C~55°C 5~24Vdc Input Voltage: Max Current Load: 3A × 4CH Max. 12A L125×W33×H20(mm) Dimensions: Max Output Power: 60W/144W/288W(5V/12V/24V) Package Size: L127×W35×H24(mm) Wireless Signal: 2.4GHz Weight(G.W.): 60g F4-5A CV Receiver Input Voltage: 5~24Vdc Working Temp.: -30°C~55°C Max Current Load: 5A × 4CH Max. 20A L175×W44×H30(mm) Dimensions: Max Output Power: 100W/240W/480W(5V/12V/24V) Package Size: L178×W48×H33(mm) Wireless Signal: 2.4GHz Weight(G.W.): 150g F4-CC CC Receiver Working Temp.: -30°C~55°C Input Voltage: 12~48Vdc Output Voltage: 3~46Vdc L175×W44×H30(mm) Dimensions: Package Size: L178×W48×H33(mm) Output Current: CC 350/700/1050mA×4CH Output Power: 1.05W~48.3W×4CH Max 193.2W Weight(G.W.): 165q Wireless Signal: 2.4GHz Note: Receiver is sold separately.

FC CE PROHS (warranty) (S years)


LTECH

Key Functions:


LTECH


Installation Instruction:

LTECH



Terminals:





DMX Wiring:




RF Wireless Wiring:


LTECH


Multi-control Wiring:



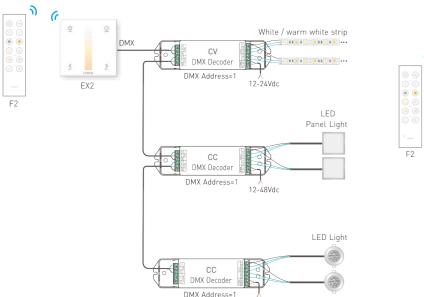

12-48Vdc

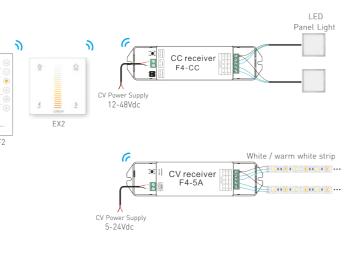


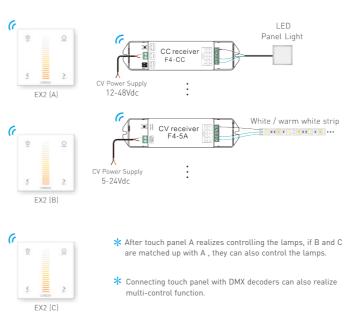

Match/Clear Code between Touch Panel & Receiver

LTECH

Match code:



Method 2 : When the touch panel is on and the wiring between the receiver and the lamps are correctly,



Clear code:

Method 1: Power on and off the receiver continuously for 5 times, If the buzzer long beep and lamps flicker twice, deactivate the matching successfully.



+

Method 2: Long press "ID learning button" on receiver for 5 seconds, If the lamps flicker twice, deactivate the matching ID learning button successfully.

Match/Clear Code between Remotes:

LTECH

Match code:



Clear code:



Long press the two keys < 2 on the touch panel B simultaneously (about 3 seconds) until the indicator light flicker several times, deactivate the matching successfully.

Match/Clear Code between Touch Panel & Remote:

Match code:

Clear code:

