
DiGi Mesh



General	
Dimensions (mm)	1000 x 1000 x 14
Cover	Transparent
Housing Color	Black
Housing Material	PC
Electronics	
Input Voltage	12 V DC
Power Supply	External (not included)
Lighting	
Optics (°)	110
LED Type	SMD2727
LEDs per Pixel	2
Lifespan (hours)	50000
Color Range	RGB
Luminous Flux	16 Lm per pixel
Control	
Control	SPI
Compatible ICs	UCS5603
Environmental	
Storage Temperature	-35 ~ +80 °C
Operating Temperature	-25 ~ +60 °C
Ingress Protection	IP67



Disclaimer





Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice. 18.





OneEightyOne Valschermkade 27 - 28 | 1059CD | Amsterdam +31 20 8200170 | info@oneeightyone.com | www.oneeightyone.com

CUL US

DiGi Mesh P50

Dimensions

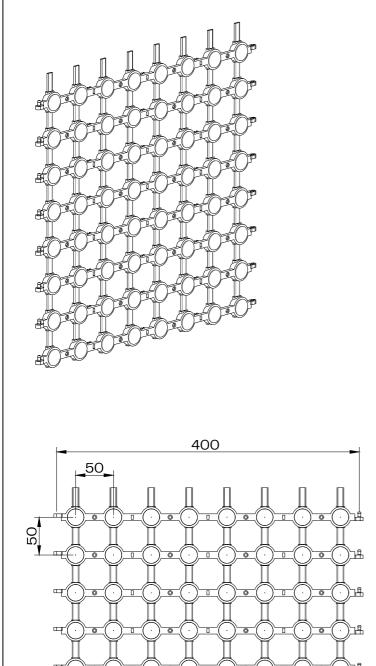



SCALE 1:2

12,5

Ø


Ø

Ø

þ

Ø

Ø

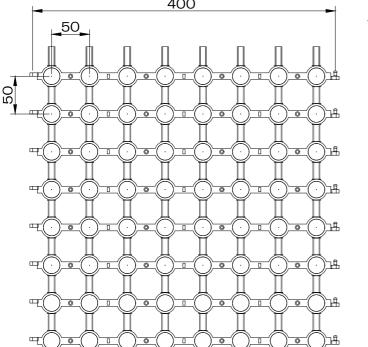

Front view SCALE 1:5

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

OneEightyOne Valschermkade 27 - 28 | 1059CD | Amsterdam +31 20 8200170 | info@oneeightyone.com | www.oneeightyone.com

©2021

18

