


1-10V LED Dimming Driver

0-144...288W 12A 12-24Vdc

- Dimming interface: 0-10V ,1-10V ,10V PWM or push button
- PWM digital dimming, no alter LED color rendering index.
- Dimming range: 0~100%, LED start at 0.1% possible.
- Max. current output: 12A.
- Short circuit / Over load protection.
- Full protective plastic housing.
- Suitable for indoor environments.

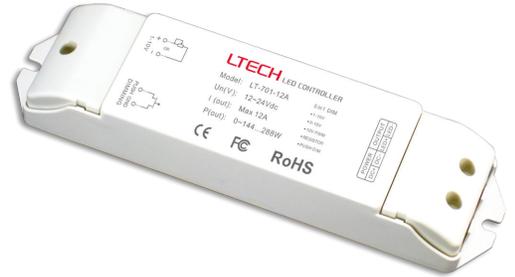


Main Characteristics


Dimming Interface: 0-10V ,1-10V ,10V PWM or push button
 Input Voltage: 12-24Vdc
 Output Voltage: 12-24Vdc
 Output: 12A×1CH
 Max. Output Power: 0-144W...288W

Dimming Range: 0~100%, LED start at 0.1% possible
 Working Temperature: -30°C~55°C
 Product Size: L175×W44×H30(mm)
 Package Size: L178×W48×H33(mm)
 Weight(G.W.): 130g


Dimensions

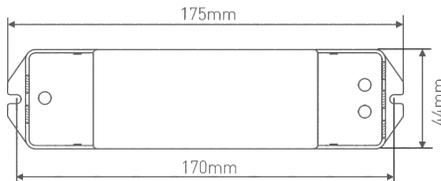



System Connection Diagram:

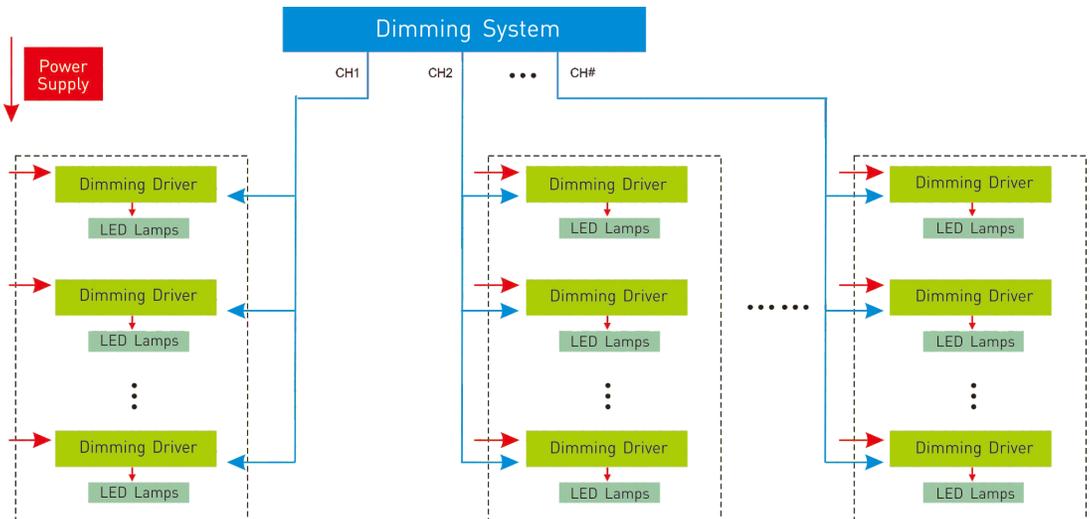

The default design doesn't support the 1-10V and push dimming that work together, if you want them to work together, please mark down when placing a order.

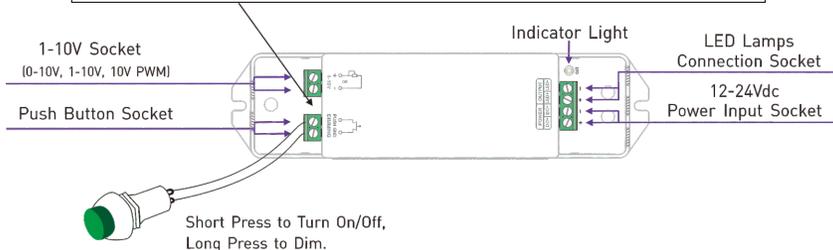

12V lamp connected, loads 0~144W(12V).

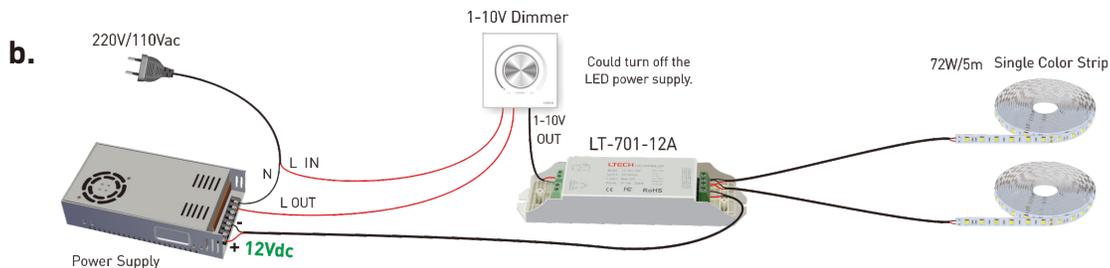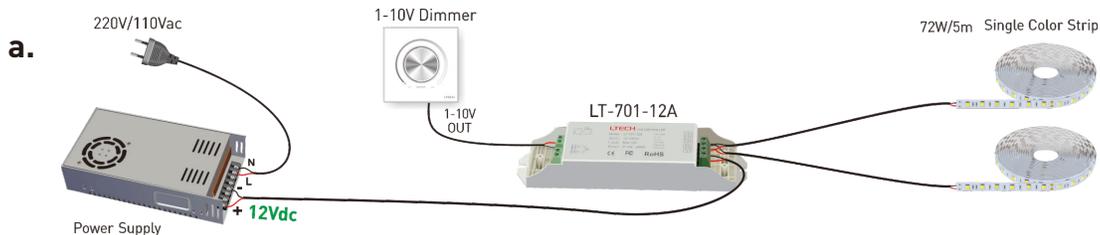

24V lamp connected, loads 0~288W(24V).

