



General

Length (mm)	5000
Width (mm)	12
Height (mm)	2
Housing Color	White
Housing Material	Copper
Mounting	3M tape
Weight (g)	140
Cutting Interval (mm)	100
Cable Length (cm)	15 cm

Electronics

Input Voltage	24 V DC
Power Consumption (W/m)	19.2
Power Supply	External (not included)
Luminous Efficacy	62 lm/W @ 5758K (RGBW)

Lighting

Emission	Direct
Optics (°)	120
LED Type	SMD5050
LED Quantity /m	70
LED Spacing (mm)	14.3
Color Range	RGBW
Color Temperature (Kelvin)	2700 K
Luminous Flux	1200 lm/m @ 5758K (RGBW27), 721 lm/m @ 15790K (RGB), 204 lm/m @ 1000K (R), 416 lm/m @ 8037K (G), 117 lm/m @ 100000K (B), 494 lm/m @ 2741K (W),
TM-21 Projection	L80 @ 85 °C (LM80-15), Reported 36000, Calculated 90000,

Control

Control	PWM
Control Units	Single pixel
Number of Channels	4

Environmental

Storage Temperature	-40 ~ +80 °C
Operating Temperature	-25 ~ +60 °C
Ingress Protection	IP20
Safety Standards	EN 62031, IEC 62471

CE

RoHS

COMPLIANT

IP20

5 year warranty

Disclaimer


Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

Important:

- Make sure power is disconnected during installation or maintenance
- Do not light up the strip when it's on the reel
- Keep cables and the LEDstrip protected from sharp objects to prevent damage
- Do not fix the LEDstrip onto wood or powdercoated material
- Align polarity when connecting the LEDstrip
- Do not twist, bend or fold the LEDstrip at sharp edges


1.

Prepare the mounting surface by removing dirt, debris or moisture.

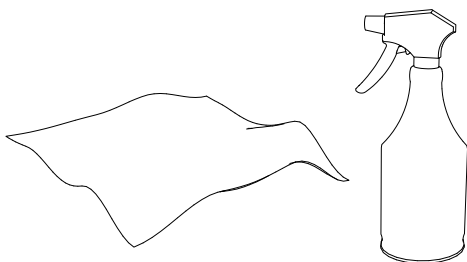


2.

The LEDstrip can be cut to size at the indicated cutting intervals.

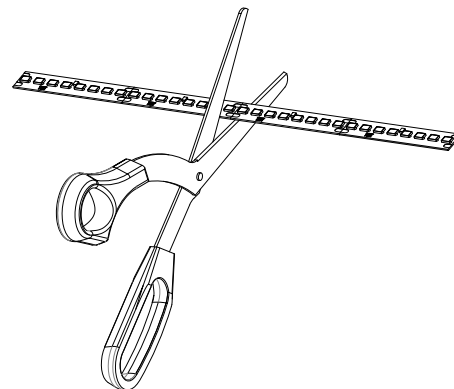


3.

Remove the backing by peeling it off.




4.

Fix onto the surface by gently pushing the LEDstrip. Make sure no air pockets will form underneath the LEDstrip.

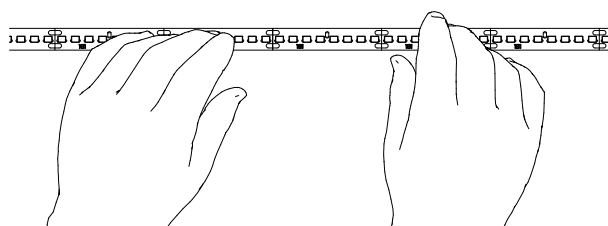

5.

When using the cable connector, make sure the connector is properly connected to the strip. The connector can be tightened by a crimping tool.

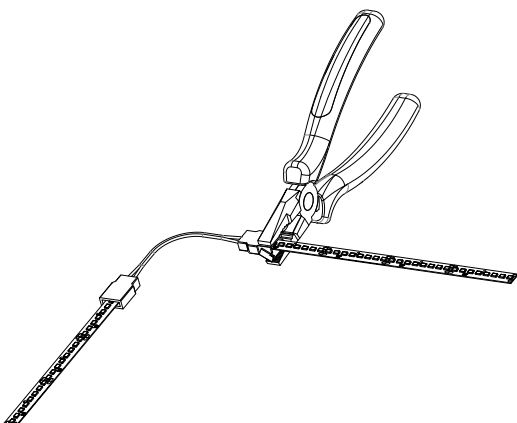

Tips:

Use 3M Primer on the mounting surface for better bonding.


Before powering the system, check if all polarities are aligned.

It's always recommended to solder the cables.


Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.


Basic DALI

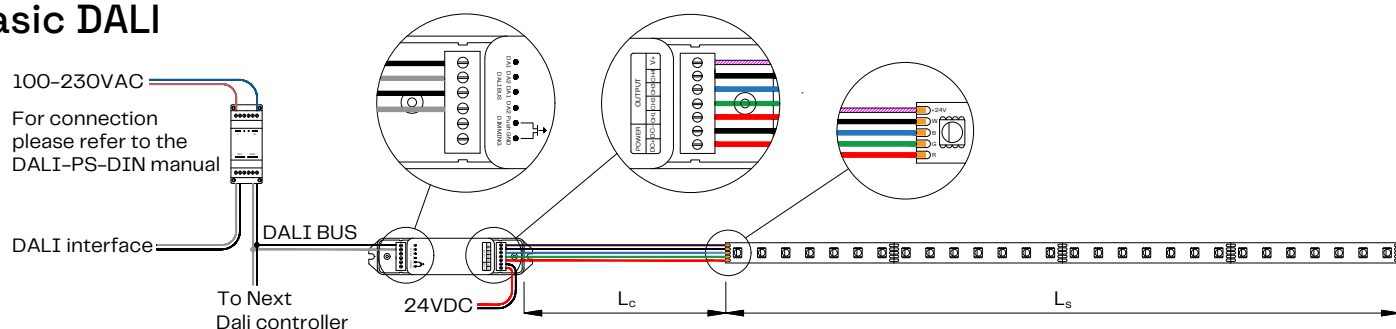

Basic Remote

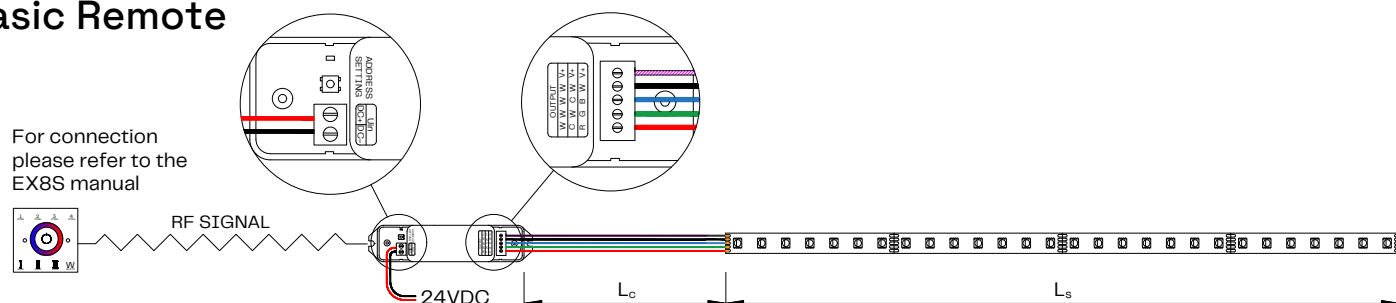


Advanced

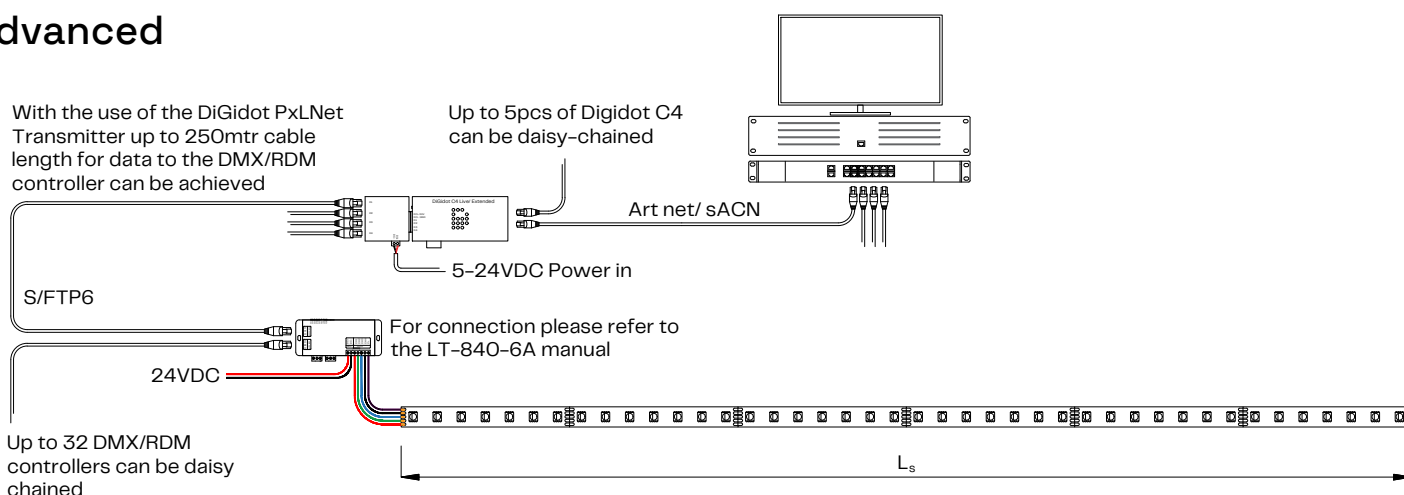


Disclaimer


Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

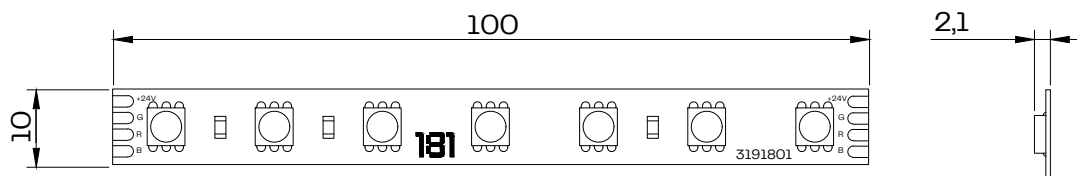**LEDstrip RGB 3191801**


SCALE 1:1

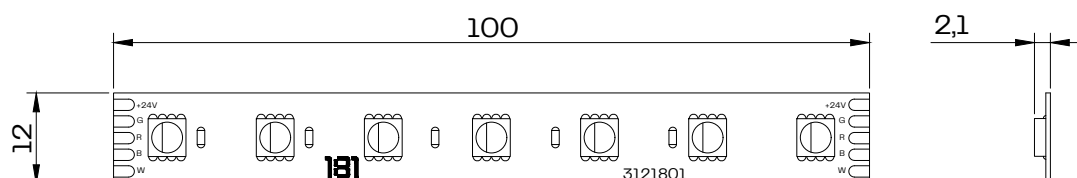**LEDstrip RGBW 3121801**


SCALE 1:1

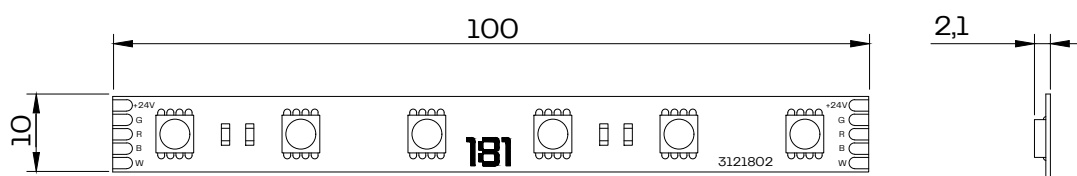**LEDstrip RGBA 3121802**

SCALE 1:1

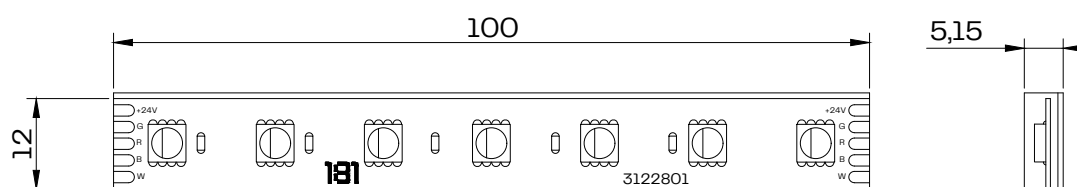**LEDstrip RGBW IP67 3122801**

SCALE 1:1

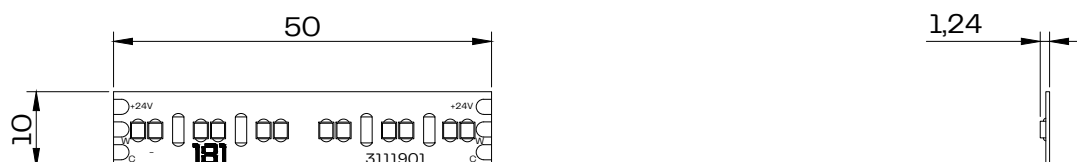**LEDstrip Adjustable White 3111901**

SCALE 1:1

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.