



General

Product Type	Constant Current Driver
Length (mm)	111
Width (mm)	35
Height (mm)	20
Housing Color	White
Housing Material	Plastic
Mounting	Surface mounted
Weight (g)	78

Electronics

Input Domain	AC
Input Voltage	220 ~ 240V AC
Input Current max (A)	0.08A @ 230V AC
Output Voltage	2 ~ 12V DC
Output Current (mA) max/output	350~700
Output Power Range (W)	0.7~8.4
Power Factor at Full Load	+0.90 @ 230VAC
Power Supply	Internal
LED Outputs	1
Anti Surge	L-N: 1kV
Efficiency	70%
THD (at full load)	15%
Input Frequency	50 ~ 60Hz
Inrush Current	10A @ 230VAC

Lighting

Color Range	Single Color
-------------	--------------

Control

Output Signal	PWM-CC
Control	TRIAC
Dimming Range	0~100%
Number of Channels	1

Protection

Protection Class	II
------------------	----

Environmental

Operating Temperature	-20 ~ +50 °C
Ingress Protection	IP20

CE IP20 5 year warranty

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

Intelligent LED Driver

- Adopt SAMSUNG/COVESTRO V0 flame resistant polycarbonate protective housings with small size and light weight.
- The clamshell design and screwless type for strain-relief, tensile strength of wires complies with the 0.5-1.5mm²wire diameter 60N tensile test, and complies with the tensile test standard GB7000.1-2015/IEC60598-1: 2014.
- Soft-on and fade-in dimming function enhances your visual comfort.
- T-PWM[™]dimming technology allows continuous and flicker-free images under high-speed shooting.
- Dimming from 0-100%, down to 0.01%.
- 0-100% flicker-free dimming with high frequency exemption level.
- Innovative thermal management technology protects the power life intelligently.
- Multi-current & wide voltage, suitable for different power LEDs.
- Class 2 LED driver, full protective plastic housing.
- Comply with Safety Extra Low Voltage standard.
- Overvoltage, overload, short circuit protection and automatic recovery.
- Suitable for indoor light applications of I /II /III type.
- Up to 50000-hour life time.
- 5-year warranty (Rubycon capacitor).

T-PWM[™]
Super depth dimming technology

Flicker-free
IEEE 1789

Dimmable:
.....
0.01-100%



Technical Specs

Model		SE-9-350-700-G1T	SE-12-350-700-G1T	SE-12-100-400-G1T	SE-15-150-500-G1T	SE-15-350-700-G1T
OUTPUT	Output Voltage	2-12Vdc		9-24Vdc	9-42Vdc	9-42Vdc
	Max Output Voltage	≤22V		≤30V	≤50V	≤50V
	Output Current	350-700mA		350-700mA	100-400mA	150-500mA
	Load Power Range	0.7W-8.4W		3.15W-12W	0.9W-12W	1.35W-15W
	Strobe Level	No visible flicker/High frequency exemption level				
	Dimming Range	0-100%, down to 0.01%				
	LF Current Ripple(<120Hz)	<3%				
	Current Accuracy	±5%				
	Ripple & Noise	≤2V				
PWM Frequency	3600Hz					
INPUT	Dimming Interface	Triac leading edge/ELV trailing edge				
	Input Voltage Range	220-240Vac				
	Frequency	50/60Hz				
	Input Current	≤0.08A/230Vac	≤0.09A/230Vac		≤0.1A/230Vac	
	Power Factor	PF>0.9/230Vac (Foll load)				
	THD	THD<15%/230Vac (Foll load)			THD<10%/230Vac (Foll load)	
	Efficiency	>70%@700mA	>76%@500mA	>78%@300mA	>80%@350mA	
	Inrush Current [typ.]	Cold start10A@230Vac (Test twidth=200 us tested under50% Ipeak)				
	Anti Surge	L-N: 1kV				
Leakage Current	<0.5mA/230Vac					
ENVIRONMENT	Working Temperature	ta: -20 ~ 45°C tc: 90°C				
	Working Humidity	20 ~ 95%RH, non-condensing				
	Storage Temperature, Humidity	-40 ~ 80°C, 10 ~ 95%RH				
	Temperature Coefficient	±0.03%/°C (-20°C ~ 45°C)				
	Vibration	10-500HZ, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively.				
PROTECTION	Overload Protection	Shut down the output and recover automatically once it exceeds 1.02-1.35 times of the rated power.				
	Overheat Protection	Intelligently adjust or turn off the current output if the PCB temperature ≥110°C. When the PCB temperature <90°C, automatically recover normal output.				
	Short Circuit Protection	When short circuit occurs, shut down the output and recover automatically.				
SAFETY & EMC	Withstand Voltage	I/P-O/P:3750Vac				
	Insulation Resistance	I/P-O/P:500VdC/25°C/70%RH≥100MΩ				
	Safety Standards	CCC	China	GB19510.1 , GB19510.14		
		TUV	Germany	EN61347-1 , EN61347-2-13 , EN62493		
		CE	European Union	EN61347-1 , EN61347-2-13 , EN62384		
		KC	Korea	KC61347-1 , KC61347-2-13		
		RCM	Australia	AS61347-1 , AS61347-2-13		
		ENEC	Europe	EN61347-1 , EN61347-2-13 , EN62384		
		CB	CB member states	IEC61347-1 , IEC61347-2-13		
		EAC	Russia	IEC61347-1 , IEC61347-2-13		
	EMC Emission	CCC	China	GB/T17743 , GB17625.1		
		CE	European Union	EN55015 , EN61000-3-2 , EN61000-3-3 , EN61547		
		KC	Korea	KN15 , KN61547		
		RCM	Australia	EN55015 , EN61000-3-2 , EN61000-3-3 , EN61547		
		EAC	Russia	IEC62493 , IEC61547 , EH55015		
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547				
	Strobe Test Standard	IEEE 1789				
OTHERS	Dimensions	111×35×20mm[L×W×H]				
	Packing	122×36×22mm[L×W×H]				
	Weight[G.W.]	77.5g±10g				



LED Current Selection


SE-9-350-700-G1T	DIP Switch									
	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	2-12V	2-12V	2-12V	2-12V	2-12V	2-12V	2-12V	2-12V	
	Output Power	0.7-4.2W	0.8-4.8W	0.9-5.4W	1-6W	1.1-6.6W	1.2-7.2W	1.3-7.8W	1.4-8.4W	
SE-12-350-700-G1T	DIP Switch									
	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	9-24V	9-24V	9-24V	9-24V	9-21.5V	9-20V	9-18.5V	9-17V	
	Output Power	3.15-8.4W	3.6-9.6W	4.05-10.8W	4.5-12W	4.95-11.8W	5.4-12W	5.85-11.7W	6.3-11.9W	
SE-12-100-400-G1T	DIP Switch									
	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA		
	Output Voltage	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V	9-30V		
	Output Power	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12W	3.15-11.9W	3.6-12W		
SE-15-150-500-G1T	DIP Switch									
	Output Current	150mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA	
	Output Voltage	9-42V	9-42V	9-42V	9-42V	9-42V	9-37.5V	9-33V	9-30V	
	Output Power	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12.6W	3.15-14.7W	3.6-15W	4.05-14.85W	4.5-15W	
SE-15-350-700-G1T	DIP Switch									
	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	9-42V	9-37.5V	9-33V	9-30V	9-27V	9-25V	9-23V	9-21.5V	
	Output Power	3.15-14.7W	3.6-15W	4.05-14.85W	4.5-15W	4.95-14.85W	5.4-15W	5.85-14.95W	6.3-15.05W	

* After DIP switches set the current, power off and then power on to make the new current effective.

* E.g. LED 3V/pcs: 9-42V can power 3-14pcs LEDs in series, 9-21.5V can power 3-7pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LED.


Product Size

Unit : mm

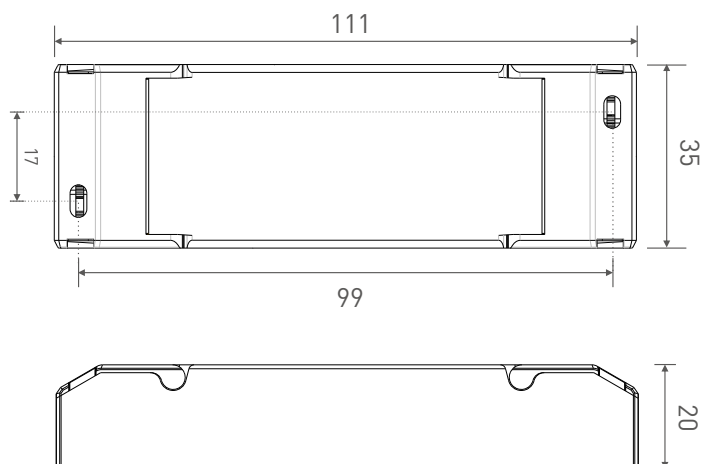

Wiring Diagram

Triac/ELV Connection Mode

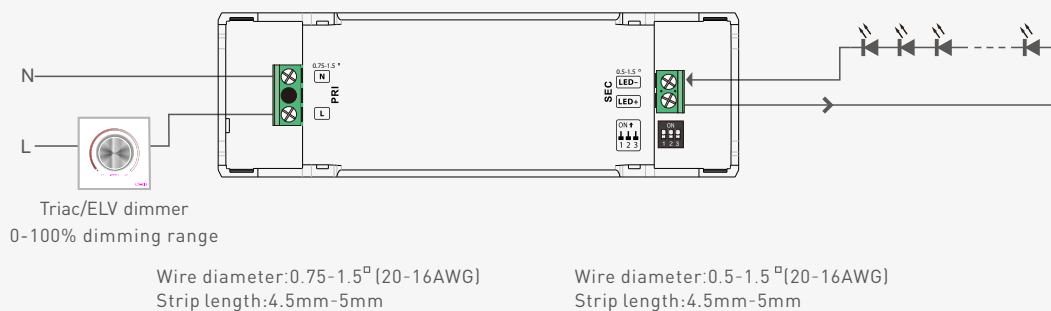

Protective Housing Drawings



1. Pry up the protective housing in the side plate position with a tool.




2. Pry up the side edge of the tension plate with a tool to remove it.

3. Use a screwdriver to connect electrical wires as wiring diagram shows.




4. Press down the tension plate to fix the electrical wires.

5. Close the protective housing.




Relationship Diagrams

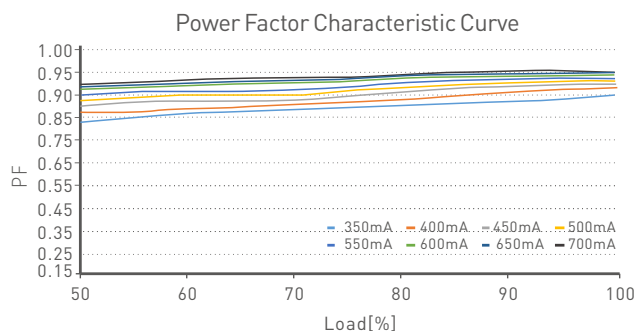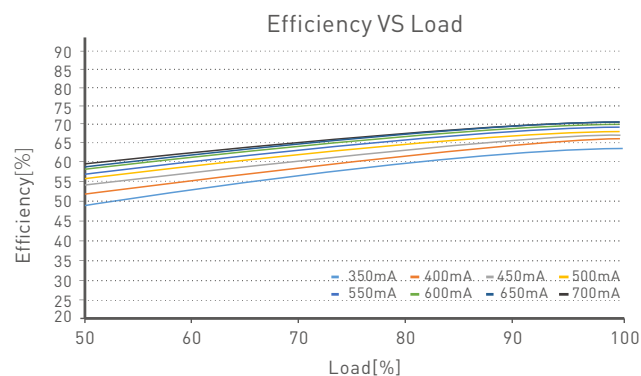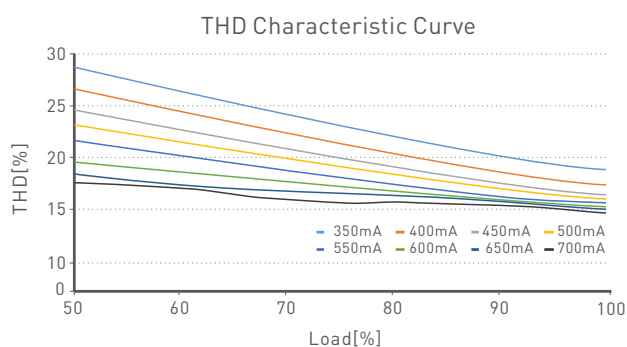

SE-9-350-700-G1T

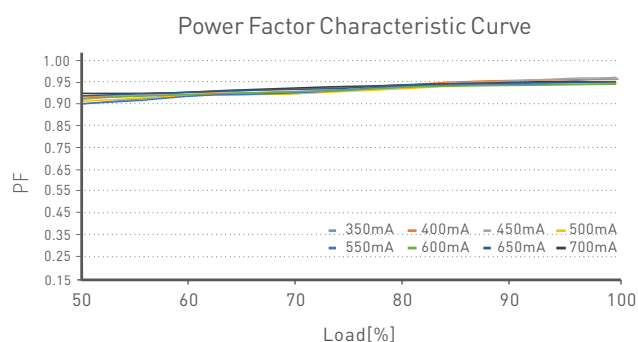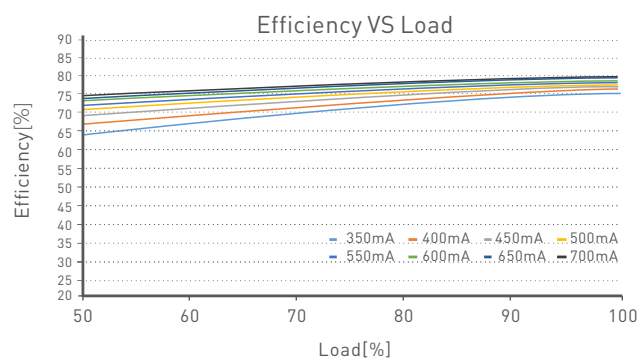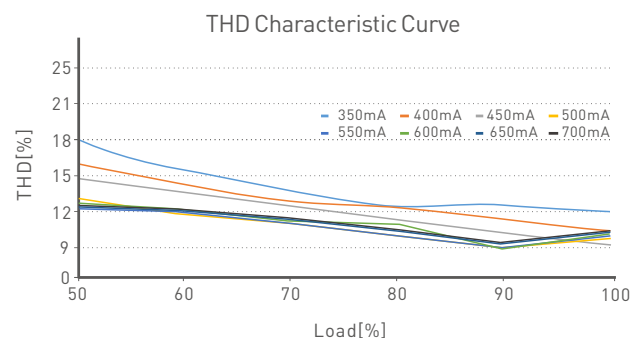


SE-12-350-700-G1T

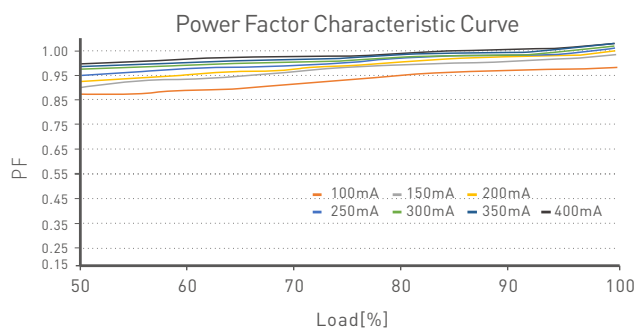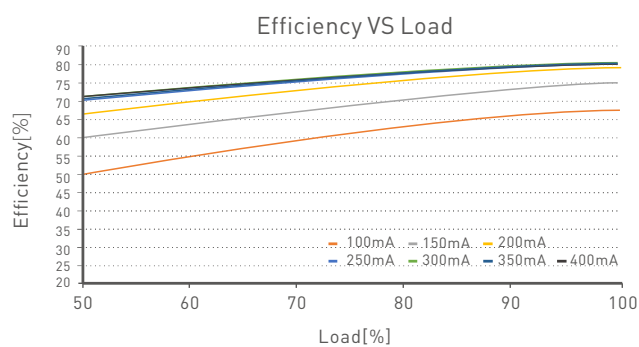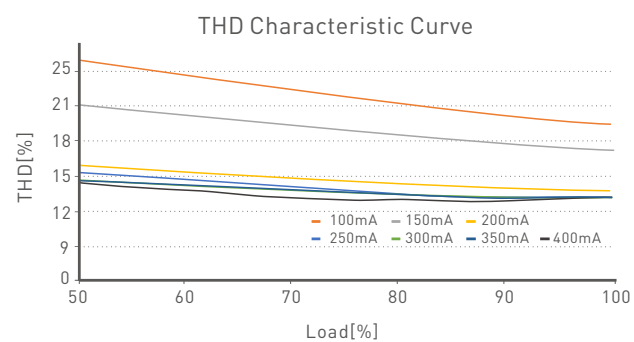


SE-12-100-400-G1T


THD Characteristic Curve

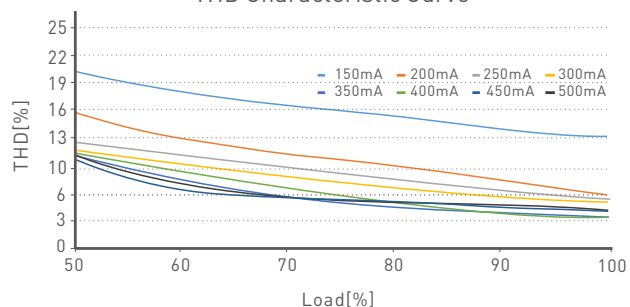

Efficiency VS Load

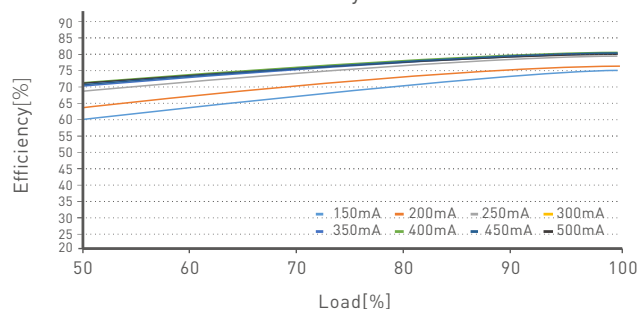


Power Factor Characteristic Curve

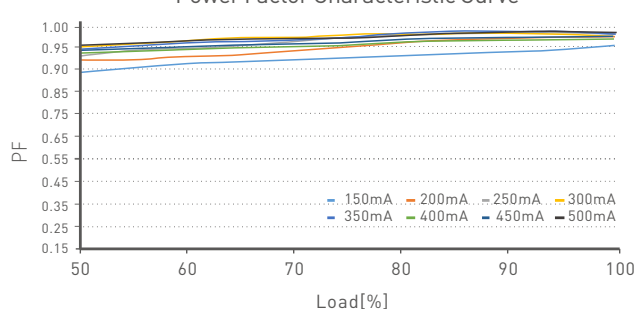


SE-15-150-500-G1T


THD Characteristic Curve

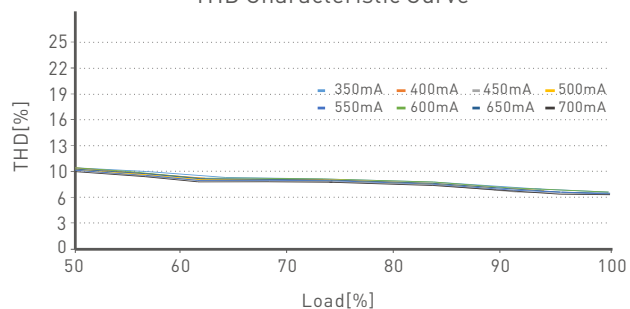

Efficiency VS Load

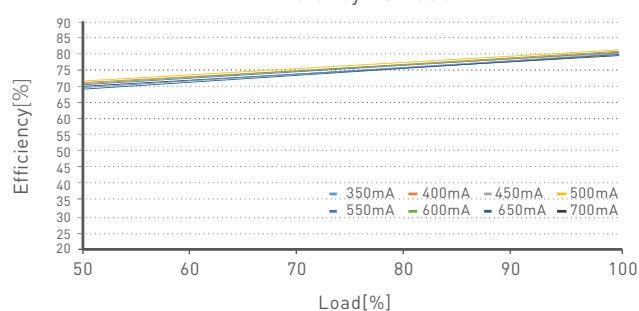

Power Factor Characteristic Curve

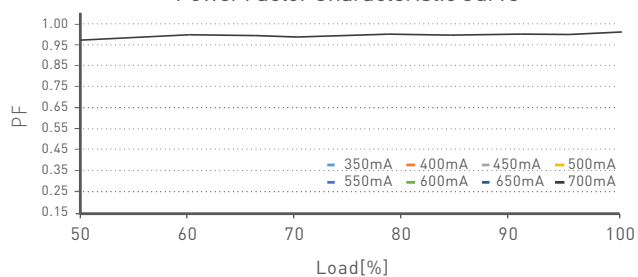

SE-15-350-700-G1T


Flicker Test Table

IEEE 1789

Limit Value of Modulation in Low Risk Areas	
Waveform frequency of Optical output	Limit value (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit Value of Modulation in No Effect Areas	
Waveform frequency of Optical output	Limit value (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$(0.08/2.5) \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- ▲ 0.1%
- ◆ 1%
- ▲ 5%
- ◆ 10%
- 20%
- ▲ 30%
- 40%
- ★ 50%
- 60%
- 70%
- 80%
- ★ 90%
- ◆ 100%

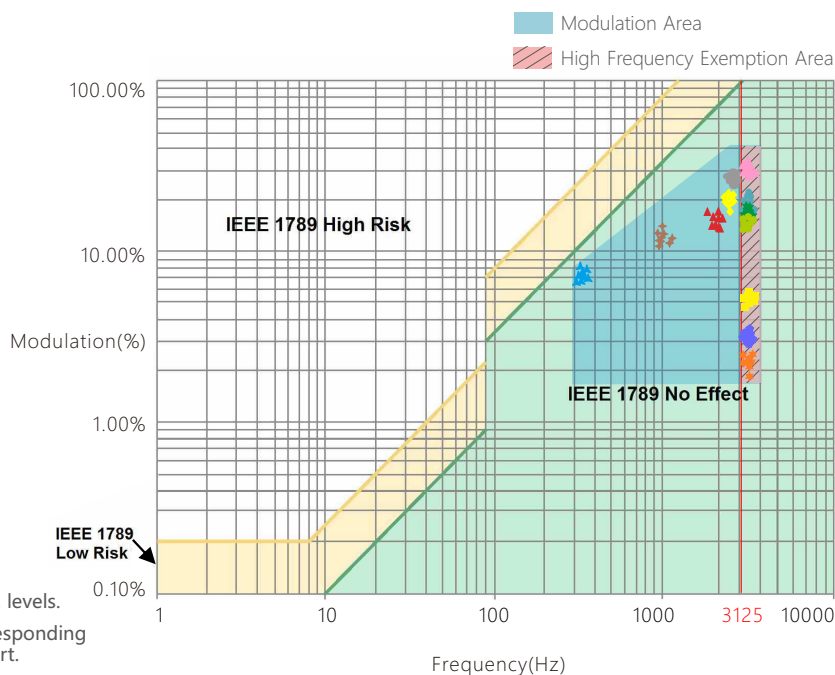

Marks in the right chart are tested results of different current levels.

The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Attentions

- Products shall be installed by qualified professionals.
- LTECH products are non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- Good heat dissipation will extend the working life of products. Please ensure good ventilation.
- Please check if the working voltage used complies with the parameter requirements of products.
- The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
- Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
- If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.

* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery : 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2020.02.21	Original version	Xu Shujun
A1	2021.04.01	Added technical specifications, LED current level selection and relationship diagrams for other four models of this product. Updated the protective housing drawings.	Xu Shujun