



General

Cover	Clear
Housing Color	Grey
Housing Material	Aluminum

Electronics

Input Voltage	48 V DC
Power Supply	N/A

Lighting

Emission	Direct
Optics (°)	90
LED Type	Cree PLCC8 3 in 1 SMD LED
LED Spacing (mm)	25
LEDs per Pixel	1
Pixel Pitch	25 mm
Color Range	RGB

Control

Control	SPI
Control Units	Multi pixel

Environmental

Storage Temperature	-35 ~ +70 °C
Operating Temperature	-30 ~ +60 °C
Ingress Protection	IP67




IP67 5 year warranty


Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.




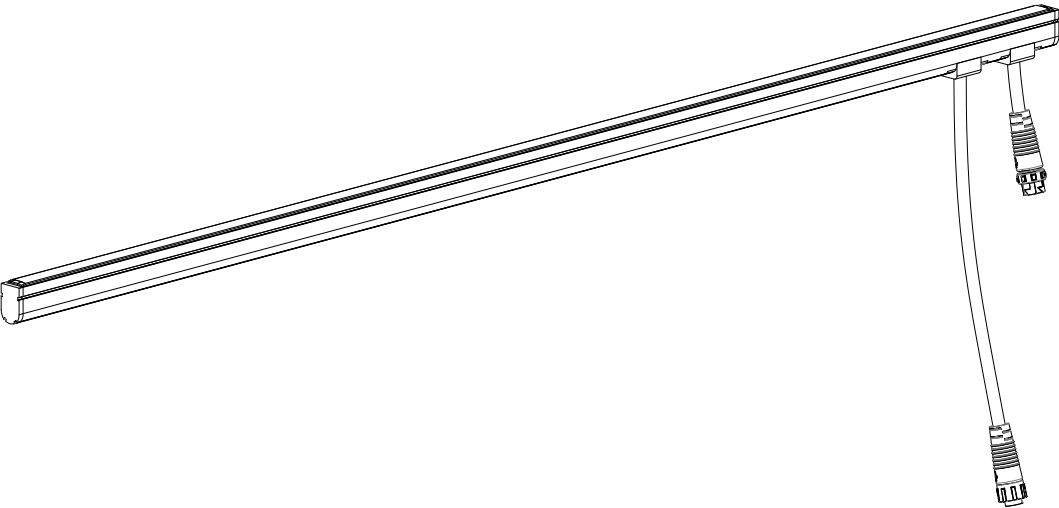


M12 Female 3Pin
Output connector




M12 Male 3Pin
Input connector



Connector
SCALE 1:3

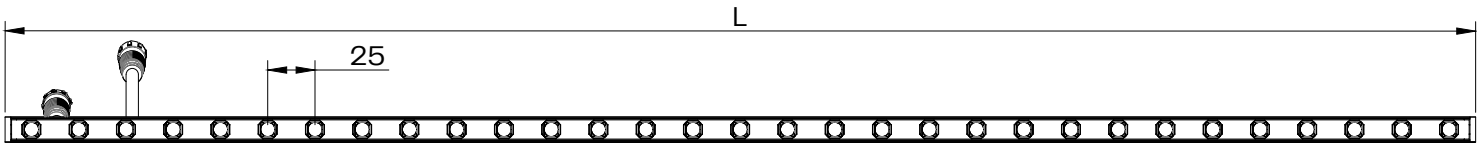

Fixture
SCALE 1:5

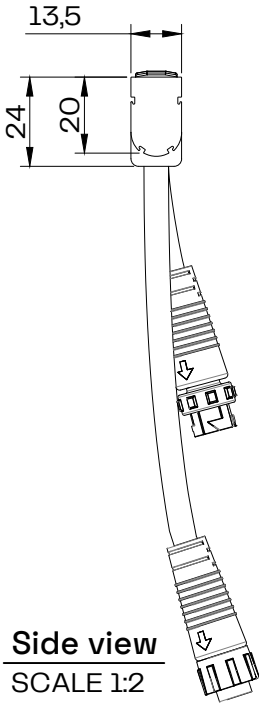

Side view
SCALE 1:2

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.