Cable Guide E-serie

3556598



Length (mm)	50
Width (mm)	33
Height (mm)	17
Housing Color	Grey
Material	Aluminum




((

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

181

oneeighty one.com

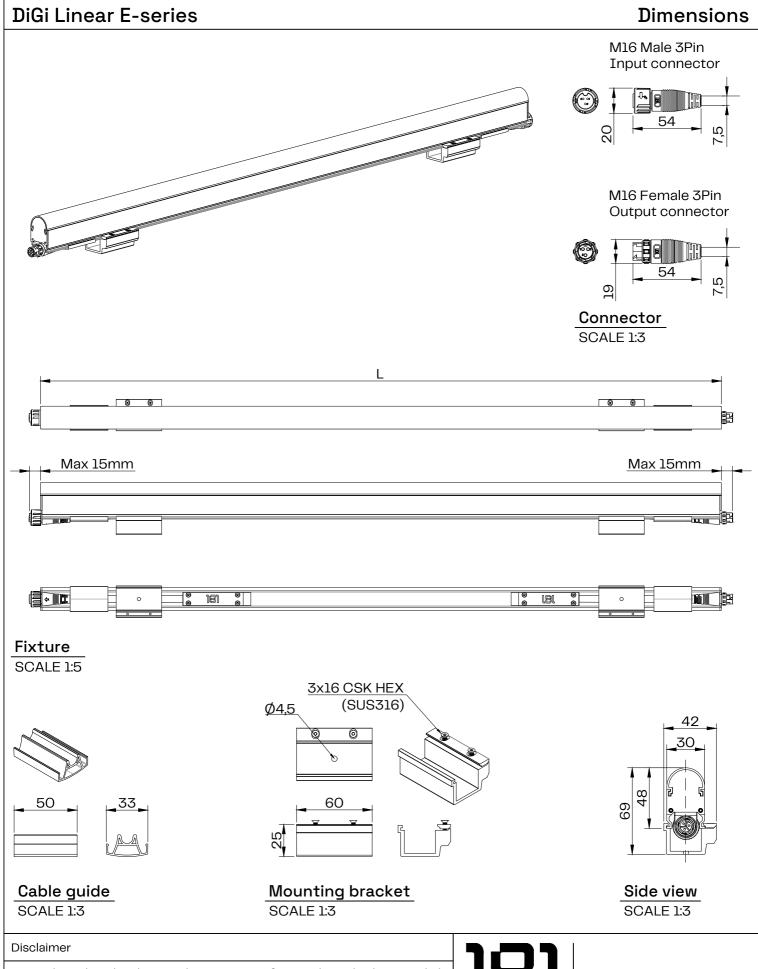

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.


One EightyOne Valschermkade 27 – 28 | 1059CD | Amsterdam +31 20 8200170 | info@one eightyone.com | www.one eightyone.com

©2021


oneeighty one.com

Important:

- Make sure power is disconnected during installation or maintenance
- Do not attempt installation in wet or severe weather conditions
- Keep cables protected from sharp objects to prevent damage
- Make sure unconnected fixtures are not exposed to raining/ snowing environment

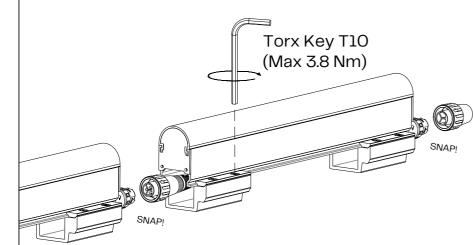

For waterproof connection make sure that the last fixture has the endcap connector fixed to the last output connector



When the fixture is installed cables are connected betwoethe fixtures the cable guide be placed to make sure the cable will not make any unnecassary movement

Minimum of 4mm and maximum of 10mm spacing between fixtures to allow thermal expansion



1. Mount bracket




2. Place fixture in bracket




3. Place feet under plate



4. Rotate in to bracket



5. Move sideways



6. Tighten the torx screws

Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

One EightyOne Valschermkade 27 – 28 | 1059CD | Amsterdam +31 20 8200170 | info@one eightyone.com | www.one eightyone.com ©2021



oneeighty one.com

Paper size: A4