
## Linear G24 RGBW3000K - 24V - 10\*25°

## 3422120

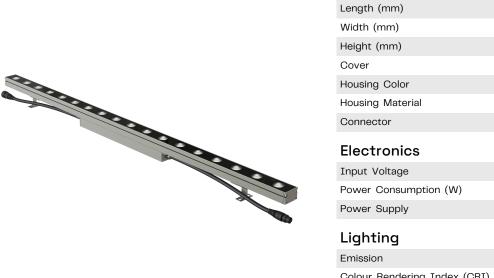

General

Connector	M16 - 5 pin
Electronics	
Input Voltage	24 V DC
Power Consumption (W)	24
Power Supply	External (not included)
Lighting	
Emission	Direct
Colour Rendering Index (CRI)	80
Luminous Flux	1025 lm (RGBW)
Color Range	RGBW
LED Quantity	18
Optics (°)	10x25
LED Spacing (mm)	55.5
Color Temperature (Kelvin)	3000 K
Control	
Control	DMX

Single pixel

4

1000

Grey

Tempered Glass

Aluminum - AA 6063

38 46

## Environmental

Number of Channels

Control Units

Storage Temperature	-40 ~ +70 °C
Operating Temperature	-30 ~ +55 °C
Ingress Protection	IP67





## Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice. 181

OneEightyOne Valschermkade 27 - 28 | 1059CD | Amsterdam +31 20 8200170 | info@oneeightyone.com | www.oneeightyone.com oneeighty

one.com