


Flexible Rubber LED Cable 5-cores RGBW White - 4x 0,5 + 1x 0,75 mm201081m

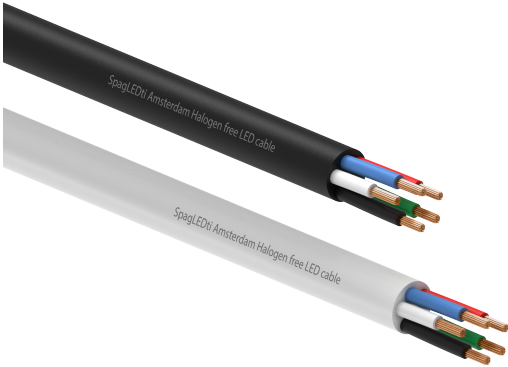

General

Diameter (mm)	6.4
Housing Material	Flexibel rubber
Weight (g)	7000
Core	4x0.5/1x0.75mm <sup>2</sup> bare copperwires
Core Color	RGBW 0.5mm <sup>2</sup> / Black 0.75mm <sup>2</sup>
Number of Cores	5
Housing Color	White

Electronics

Conductor Resistance	40.1 ohm/km (0.5mm <sup>2</sup> ), 26.7 ohm/km (0.75mm <sup>2</sup> ), Max 50V
Operating Voltage (V)	

Lighting

Color Range	RGBW
-------------	------

Environmental

Storage Temperature	-30 ~ +70 °C
Operating Temperature	-10 ~ +70 °C
UV Constant	yes
Halogen Free	yes
Safety Standards	IEC 60332-1-2, IEC 60332-3-24, IEC 60332-3-25, IEC 60754-1, IEC 60754-2, IEC 61034-2, ISO 4892-2
Enclosure	



Disclaimer

Due to the technical evolution and improvement of our products, the data provided in this document may be updated on a regular basis, and as such, confirmation of this information is strongly recommended prior to the order process. OneEightyOne is not responsible for any discrepancies in this document following changes in our products. We reserve the right to make technical changes to our products and to change information, at its sole discretion, without notice.

