


## 2 4G LED RGBW Controller



### Main Characteristics


#### F4 RF RGBW Remote Control

- Remote Option: RGBW
- Working Voltage: 3Vdc (Battery CR2032)
- Wireless Frequency: 2.4GHz
- Working Temperature: -30 -55
- Package Size: L150xW46xH18(mm)
- Weight(G.W.): 85g

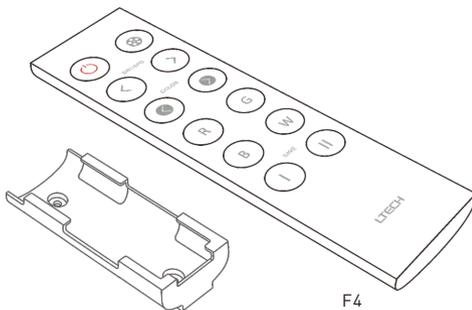


#### F4-3A CV Receiver

- Input Voltage: 5-24Vdc
- Current Load: 3A x 4CH Max. 12A
- Max Output Power: 60W/144W/288W(5V/12V/24V)
- Working Temperature: -30 -55
- Package Size: L127xW35xH24(mm)
- Weight(G.W.): 60g



F4-3A



F4-5A/F4-CC

#### F4-5A CV Receiver


- Input Voltage: 5-24Vdc
- Current Load: 5A x 4CH Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30 -55
- Package Size: L178xW48xH33(mm)
- Weight(G.W.): 150g

#### F4-CC CC Receiver


- Input Voltage: 12-48Vdc
- Output Voltage: 3-46Vdc
- Output Current: CC 350/700/1050mAx4CH
- Output Power: 1.05W-48.3Wx4CH Max 193.2W
- Working Temperature: -30 -55
- Package Size: L178xW48xH33(mm)
- Weight(G.W.): 165g

Note: Receiver is sold separately.


### Dimensions




F4



Holder




F4-5A/F4-CC




F4-3A

# Operating Instruction for Remote:

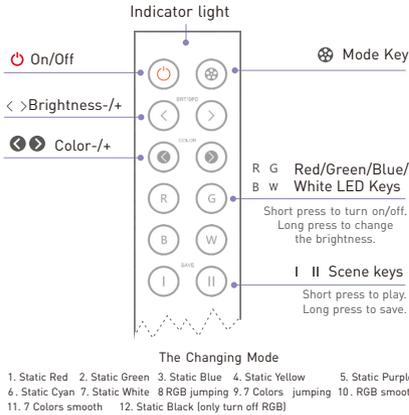


## Match/Clear code between remotes

### Match code:

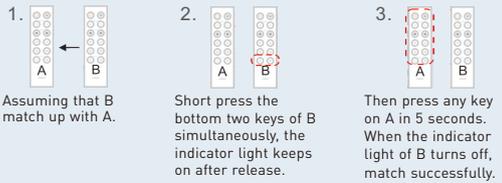


### Clear code:




## Match/Clear code between remote and receiver


### Match code:

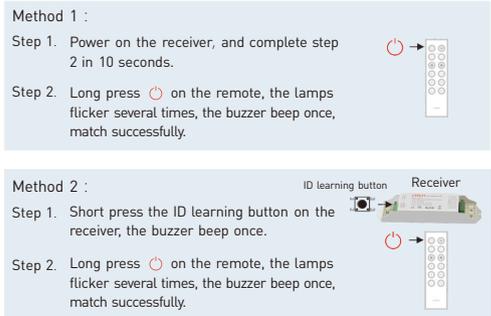

### Clear code:

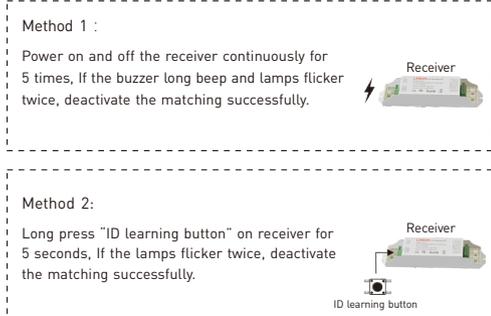

## Wiring Diagram :

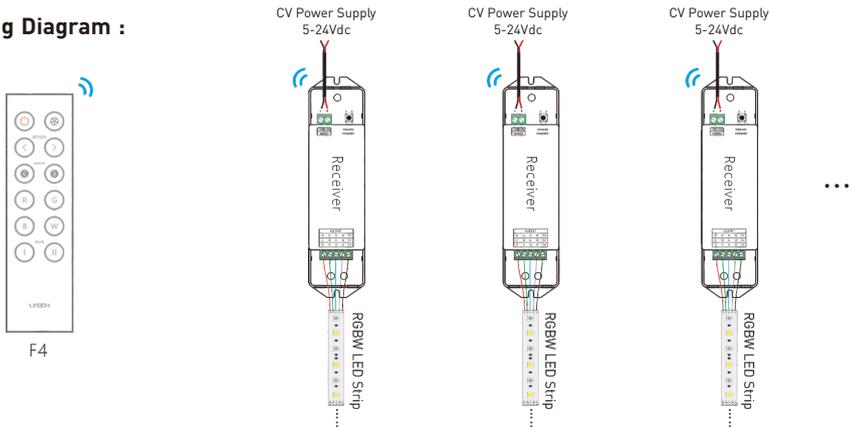

◆ Could connect RGB/RGBW LEDs.